
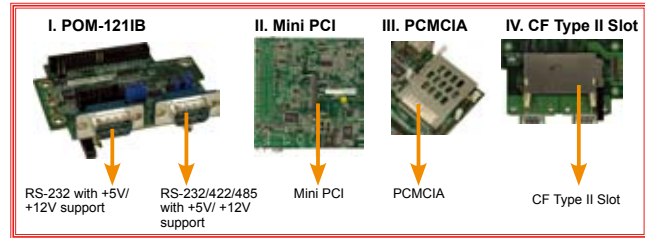
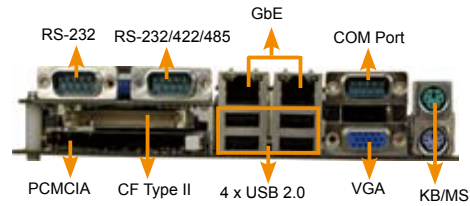


# A200

Mini-ITX Motherboard, ULV Intel® Celeron® M 1GHz/600MHz, LVDS, PCMCIA, Mini PCI and CF Type II

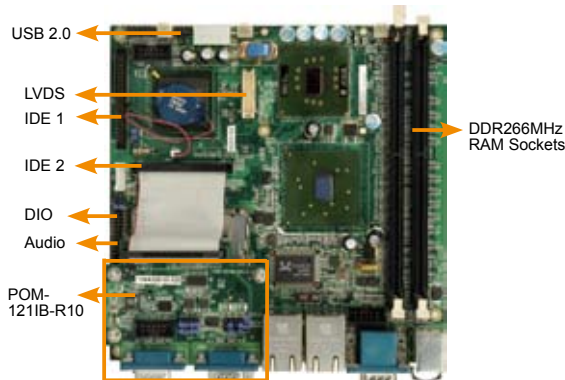

## Specifications

- ◆ CPU  
ULV Intel® Celeron® M 600MHz 512K cache / 1.0GHz Zero cache Processor
- ◆ System Chipsets  
Intel® 852GM + ICH4
- ◆ BIOS  
AMI BIOS
- ◆ System Memory  
2 x 184-pin DDR266MHz up to 2GB
- ◆ Ethernet  
Dual RTL8110S for GbE chipsets
- ◆ I/O Interface  
6 x USB 2.0  
1 x CF Type II  
3 x RS-232  
1 x RS-232/422/485  
2 x PS/2 for KB/MS  
2 x IDE
- ◆ Expansions  
1 x Mini PCI  
1 x PCMCIA
- ◆ Digital I/O  
8-bit digital I/O, 4-bit input/ 4-bit output by super I/O
- ◆ Infrared Interface  
By super I/O
- ◆ Super I/O  
ITE IT8712F
- ◆ Audio  
Realtek ALC655 with AC'97 codec
- ◆ Display Interface  
VGA integrated in Intel® 852GM  
18-bit dual-channel LVDS
- ◆ Watchdog Timer  
Software programmable supports 1-255 sec. system reset
- ◆ Power Supply  
AT/ATX power supply support
- ◆ Power Consumption  
5V@2.2A, 5VSB@0.5A, 12V@0.4A, -12V@0.2A  
(ULV Intel® Celeron® M 600 512K with DDR266MHz, 512MB RAM)
- ◆ Temperature  
Operating: 0°C ~ 60°C (32 ~ 140° F)
- ◆ Humidity  
Operating: 5% ~ 95% non-condensing
- ◆ Dimensions  
170 mm x 170 mm
- ◆ Weight  
GW: 1100 g; NW: 500 g

## Packing List


- 1 x A200 Industrial Motherboard
- 1 x ATA33 HDD Cable (P/N: 32200-000009-RS)
- 1 x Power Cable (P/N: 32100-124801-RS)
- 1 x Audio Cable (P/N: 32000-035802-RS)
- 1 x COM 2 Cable (P/N: 19800-000047-RS)
- 1 x Mini Jumper Pack
- 1 x Utility CD
- 1 x QIG (Quick Installation Guide)



## Features

1. ULV Intel® Celeron® M 1GHz zero cache processor
2. CRT/LCD VGA integrated in i852GM, support 18-bit dual LVDS for independent dual display
3. Dual DDR266MHz SO-DIMM support up to 2GB
4. Support PCMCIA and mini PCI extension slots

## Dimensions (mm)

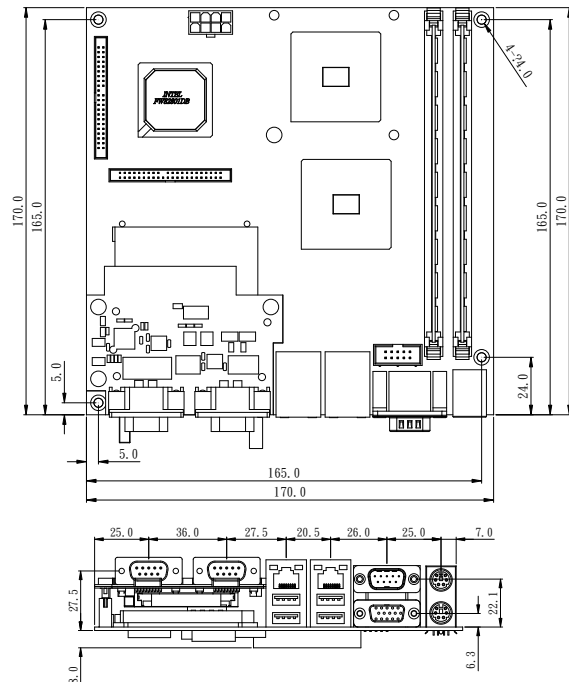

## Ordering Information

Part No.	Description
A200-600-R10	Mini-ITX with Intel® Celeron® M 600MHz/512K Processor, VGA/ LVDS, Dual GbE, PCMCIA, Mini PCI and Audio
A200-1GZ-R10	Mini-ITX with Intel® Celeron® M 1GHz Zero Cache Processor, VGA/LVDS, Dual GbE, PCMCIA, Mini PCI and Audio
CB-USB02-RS	USB Cable