


# EBC-1000G





## Embedded Chassis for WAFER Series SBC

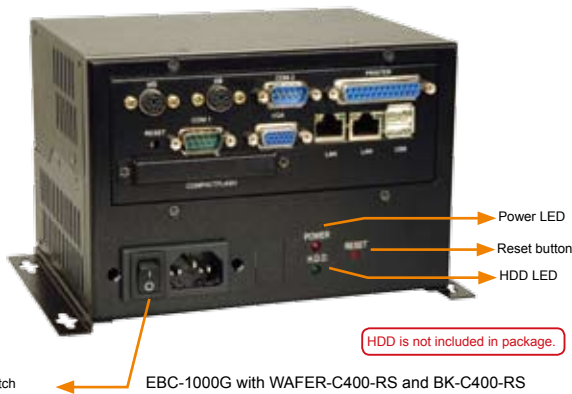

### Features

- ◆ RoHS compliant design
- ◆ One 2.5" hard drive bay
- ◆ One 4 cm cooling fan
- ◆ AC/DC power supply compatible




SBC model	WAFER-LX2	WAFER-6612	WAFER-LX	WAFER-GX
SBC				
CPU	AMD® Geode LX 800 500 MHz	Intel® Pentium® M/Celeron®M CPU	AMD® Geode LX 800 500 MHz	AMD®Geode GX 466 333 MHz
I/O Bracket	BK-LX2-RS with 4 x COM	BK-6612-RS with 2 x PS/2	BK-LX800-RS-R11 with 2 x PS/2	BK-LX800-RS-R11 with 2 x PS/2

### Specifications

<b>Construction</b>	Heavy duty metal
<b>SBC Form Factor</b>	3.5" WAFER series SBC
<b>Drive Bays</b>	1 x 2.5" HDD
<b>Cooling Fans</b>	1 x 4 cm
<b>Indicators</b>	Power, HDD
<b>Buttons</b>	Power switch
<b>Operating Temperature</b>	0°C~50°C
<b>Operation Humidity</b>	10% ~ 90%
<b>Color</b>	B: Black
<b>Weight (Net/Gross)</b>	1.2 kg / 2.2 kg
<b>Dimensions (DxWxH)</b>	130 mm x 172.2 mm x 116 mm

### Dimensions

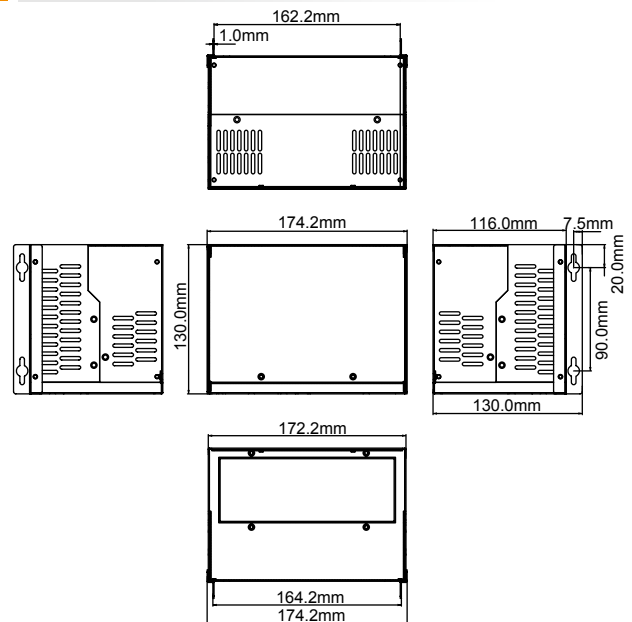

### Ordering Information

Part No.	Description
<b>EBC-1000GB/ACE-890AP</b>	Industrial embedded chassis for WAFER series SBC, black, with ACE-890AP-RS, RoHS
<b>BK-6612-RS</b>	I/O bracket for WAFER-6612, black, RoHS
<b>BK-LX800-RS-R11</b>	I/O bracket for WAFER-LX/ GX, black, RoHS
<b>BK-LX2-RS-R10</b>	I/O bracket for WAFER-LX2-800, black, RoHS

### Power Supply Options

Type	Model No.	Input Type	Watt
AT	ACE-890A-RS	AC	86W
	ACE-890AP-R20-RS	AC	86W
	ACE-890V-RS	12 VDC	72W
	ACE-890C-RS	24 VDC	86W
	ACE-890T-RS	48 VDC	86W
	ACE-890P-RS	100 VDC	86W

1 Industrial Computing Solutions

2 Embedded Computing Solutions

3 RISC-Based Embedded Solutions

4 Industrial Data Collector/Server Solutions

5 Video Capture Solutions

6 I/O Communication Solutions

7 Panel Solutions

8 Power Supply/Network Communication/Peripherals